

Gary, Howorth Univ of Strathclyde, UK

Ivana, Kockar Univ of Strathclyde, UK

Paul, Touhy Univ of Strathclyde, UK

Graeme, Flett John, Bingham Energy Technology Centre Ltd, UK Univ of Strathclyde, UK



SE Technology Park: Proposed Low Carbon Energy System





ERA Learn/EU Horizon 2022 Project (SIES 2022)

"Learning by Doing"

Enhanced VPP+ Design – using multiple vector energy pools

- Energy Pools (Flexibility, Thermal, DSR, electrolyser, EV's, Wind, PV)
- ETC Demo site @ East Kilbride, Scotland
- Congested DSO Area
- Focus of Paper on overall architecture (Hardware and Software) of Demonstrator plant, highlighting challenges and lessons learned

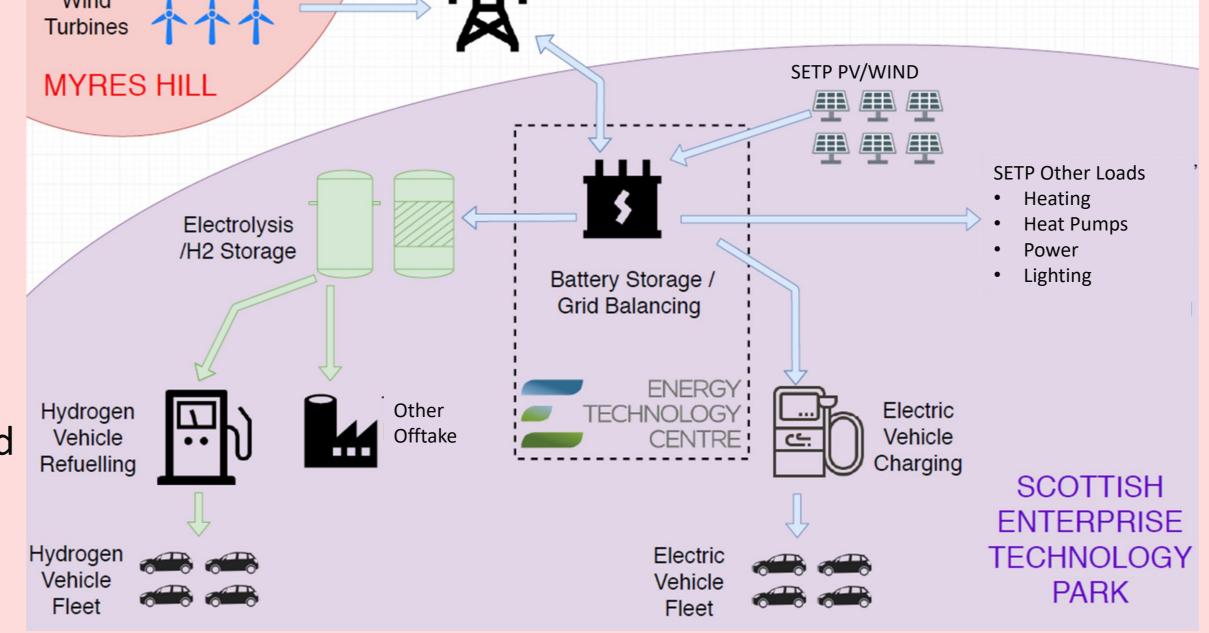

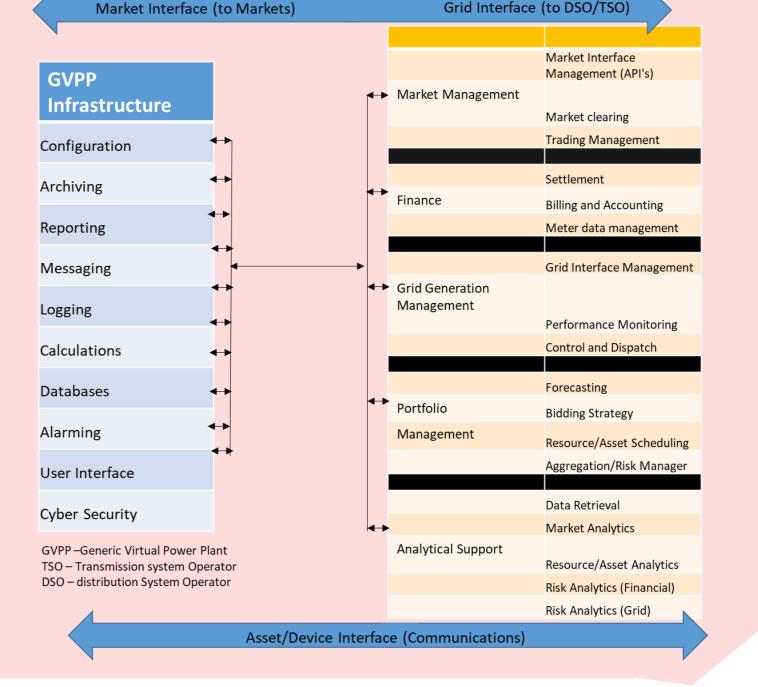

Generic VPP Design

Introduction	
Hardware Design	
Software Design	
	\rightarrow

Asset data is sent

based systems via

SCADA. API's

such data

Send Control signals

used to access

to various cloud 🛶

Get Data

from assets

Data from

assets

Create

Asset

Schedules

Assets:

Wind, Heat

Pump,PV,

Thermal Store

Send

Control

signals

Forecasting modules:


Loads (thermal/electricity)

Market prices

Algorithm Selection

Asset and Data Communication: High Level Design

Energy Management Control System" (EMCS) provides control and data logging interface between the VPP application and the various energy assets

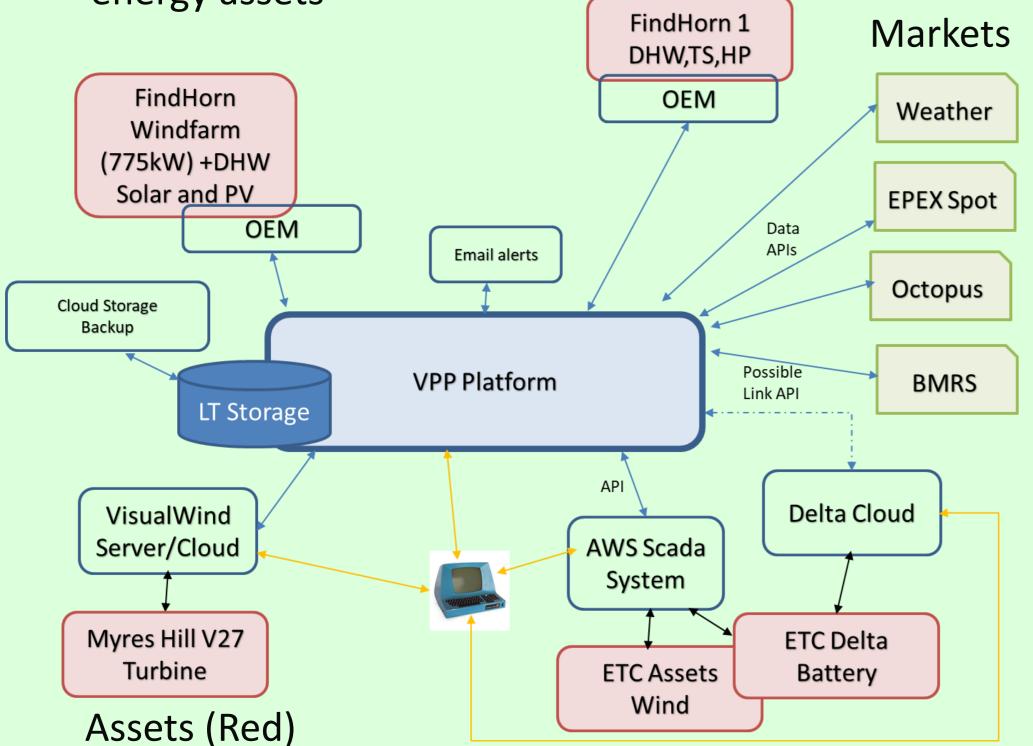

Software Architecture

Markets:

Communication Modules API's

Optimizer

Module

framework developed for simulating aggregators

Get Market

' Weather

Loads/Generation

Prices

Data/

Control

signals

Weather

Service


Create Reports for

Dissemination

Weather

Forecasts

VPP Operation

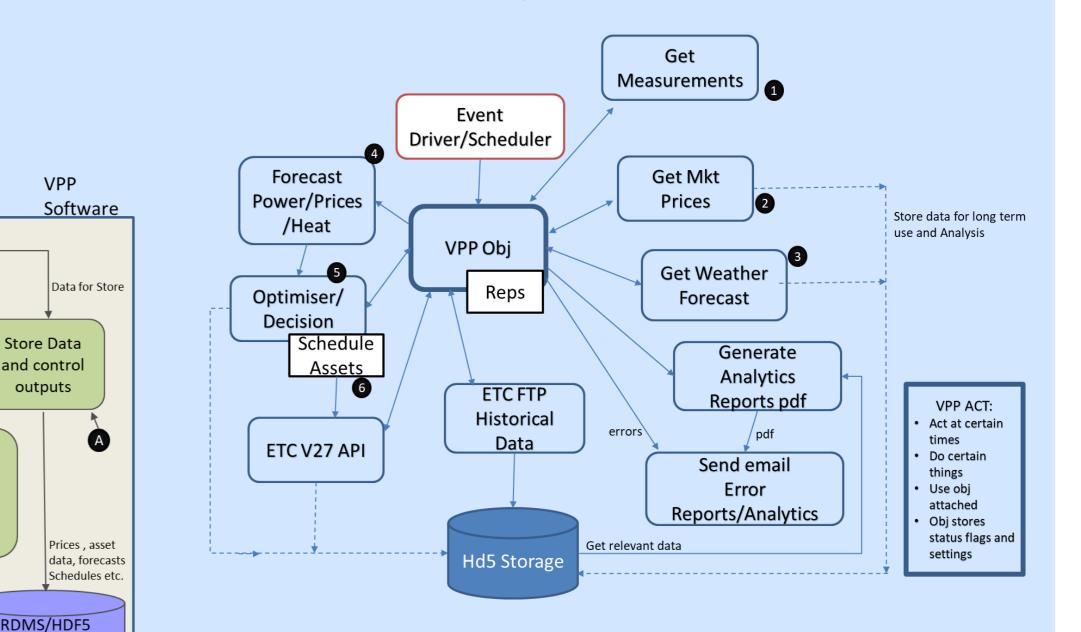

- Platform allows for multiple decision models to be used e.g. ensemble approach or change in decision approach.
- RESTful API communication between services.

Challenges/Lessons Learned

Software architecture based on existing

(PyEmLab [1]). Rapid Prototype /Agile

development approach has been used.

Hardware

- Many different asset manufactures non standard interfaces. Many legacy assets at ETC.
- Integration into VPP platform has been time consuming
- Defining measurement and communication protocols has been problematic
- Chip Shortages for PLC. Lead times for equipment.

References

G. Howorth, "Extending the AgentSpring/EMLab Tool to Evaluate Additional Agent Behaviour such as Electric Vehicles and Demand Side Response, ed. ETP Annual Conference 2019 - Energy Technology Partnership Dundee UK: ETP, 2019.



Software

VPP

Store Data

and control

outputs

Databases

Back Testing*

and

Analysis:

- Existing VPP software solution, but much of the functionality missing vs an "ideal" VPP.
- Forecasting important to the commercial success of the unit.
- Difficult to forecast Flexibility market prices accurately.
- Considerable effort in error capture & communication retry routines expended.
- Care to be taken with spurious data (Pre-processing).
- Current solution times for decision making software relatively fast – but using deterministic approaches.





Gary, Howorth Univ of Strathclyde, UK

Ivana, Kockar Univ of Strathclyde, UK

Paul, Touhy Univ of Strathclyde, UK

Graeme, Flett John, Bingham Univ of Strathclyde, UK Energy Technology Centre Ltd, UK



SIES [Smart Integrated Energy Systems: Enhanced Virtual Power Plant VPP+

Energy Pool Integration for Local and Regional Resistance]


Aim


- ERA-Net's SIES 2022 project focuses on the technological and business related barriers and opportunities of how VPPs can function in flexibility markets.
- The SIES 2022 project aims to develop a digital energy utility management service (VPP) capable of managing local and regional energy systems and markets using a number of energy pools – use cases. E.g. ETC, FindHorn .

"Learning by doing" Project

Project Overview

SPEN Power Heat Map (Congested Area)

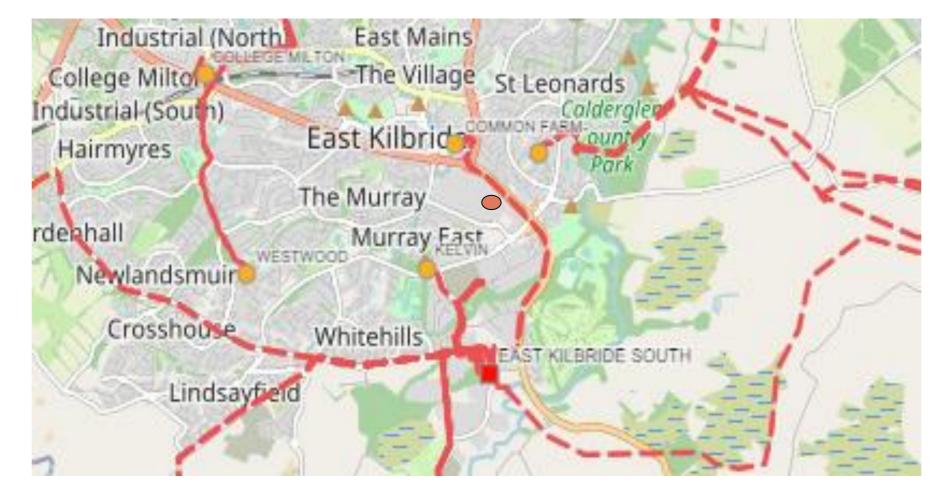

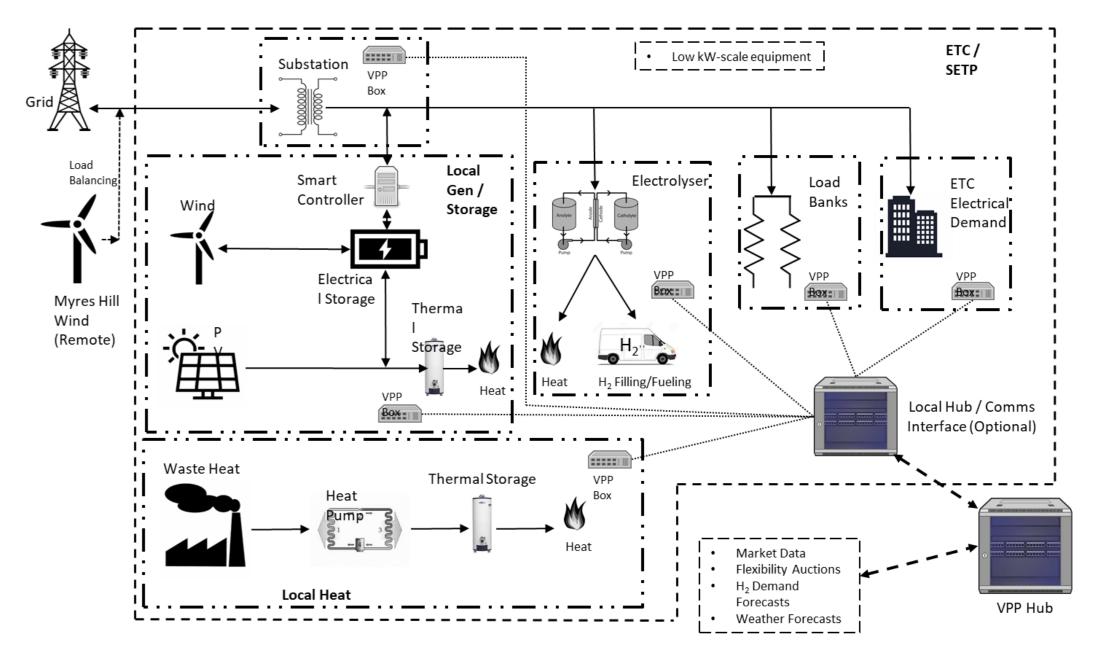

Business Model Spectrum

The second s	

Business Models

Overview

- Number of Proposed Energy Pools (ETC) [Myres hill & SETP], Community Energy, Strath Energy Centre, PNDC) – Heat DSR, HY2GO etc.]
- VPP ++ (connecting different types of assets) including DSR), to maximize profits and provide support to an already congested grid;
- Algorithms to be developed for operation
- VPP Software under development
- Smart Transformer (ANM)

BAU	Simple VPP	Enhanced VPP+
Sell output/Buy Electricity input from	 Few assets e.g. PV + Battery 	 Multiple Sites/Energy Pools
retailer	 Use of Storage (time 	 Multiple Power
Treat assets as	Shift)	Markets
separate entities	Optimization of Fuel	 Value Stacking
Multiple Long Term	/asset switching or use simple Heuristic eg	Portfolio optimization
Contracts (one for each asset) selling all	Buy low sell high	 Risk Management
output	 1 end use market 	Complex Stochastic
Single site	 Use own assets 	 Use of others assets
Indirect sale of	 Indirect sale of 	 Direct sale of
electricity to markets	electricity to markets	electricity to markets
		Trading
Store Two Server 1		


- Key element of the project was to develop Business models for a VPP.
- By collating data, analyzing it and simulating different use cases – it has been possible to value these business models.
- Work is underway to develop heuristics that will identify which models work best and under what conditions

Decision Options

- At each time step a decision has to be made about resources.
- Growing Complexity with more assets

Value Stacking

Markets, Value Stacking

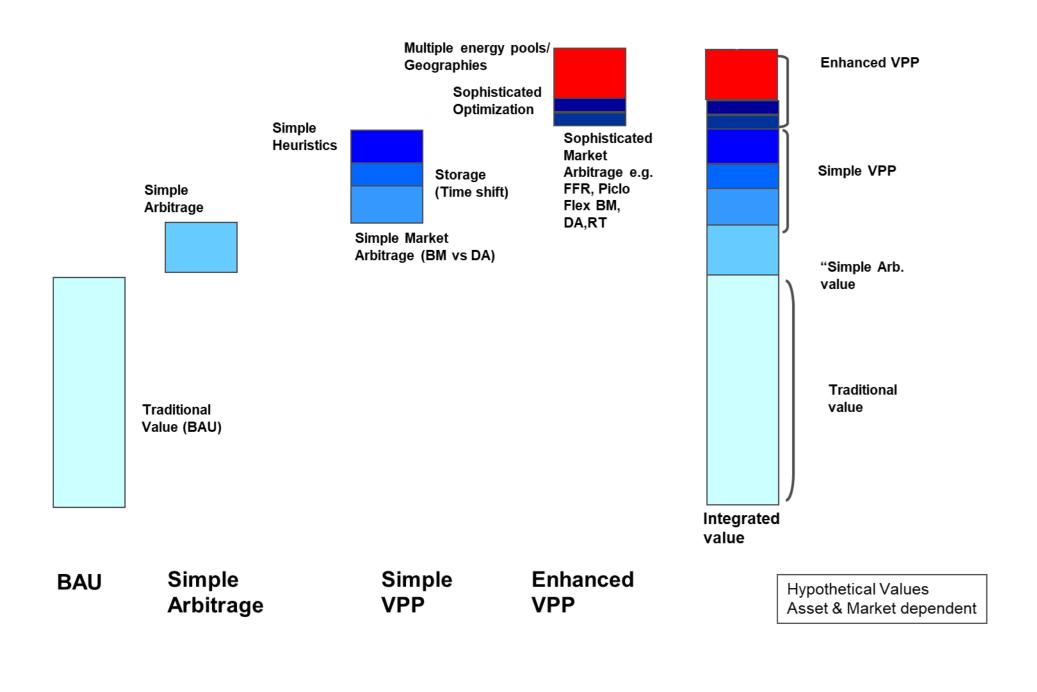

Although assessments shown herein

assume a sale of flexibility services to one


- market, t is expected that VPP providers
- would sell to one more than one market.
- Some of these markets could be sold

concurrently.

This results in revenue streams that can

be "stacked"

Plus assets are stochastic

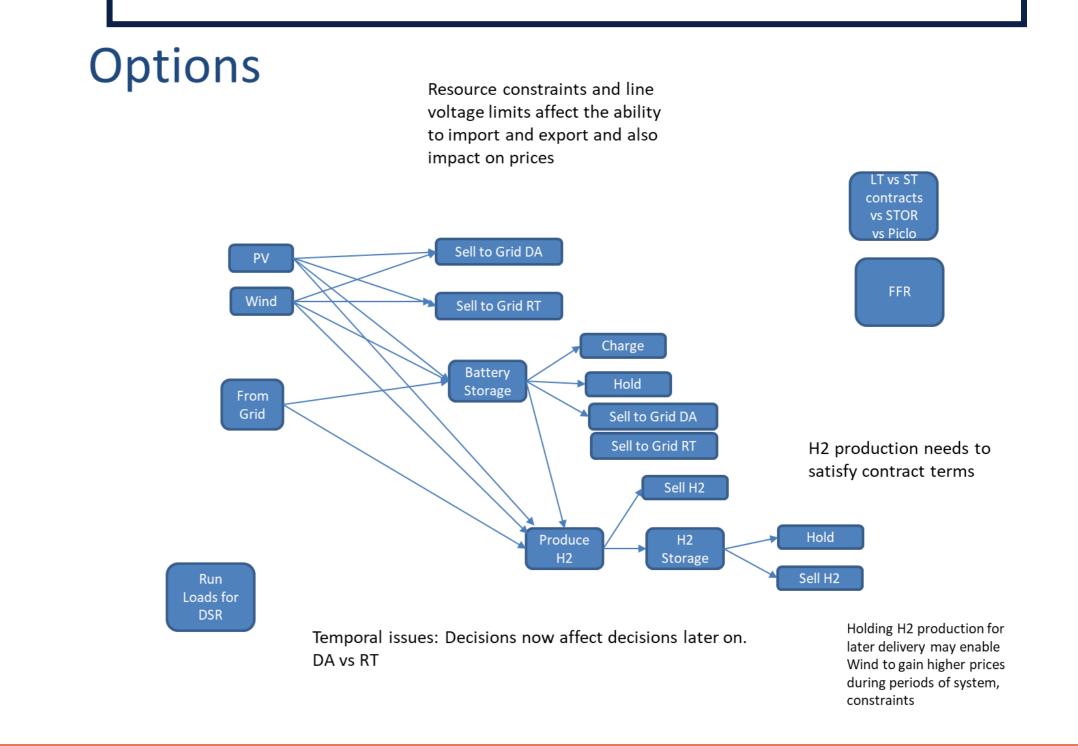



Gary, Howorth Univ of Strathclyde, UK Ivana, Kockar Univ of Strathclyde, UK Paul, Touhy Univ of Strathclyde, UK

Touhy Graeme, Flett rathclyde, UK Univ of Strathclyde, UK

tt John, Bingham clyde, UK Energy Technology Centre Ltd, UK




SIES [Smart Integrated Energy Systems: Enhanced Virtual Power Plant VPP+ Energy Pool Integration for Local and Regional Resistance]


VPP Hardware Overview

VPP Asset Network

- Two key components
 - VPP platform hosted on server on or off site. Currently offsite.
 - Energy Management Control System (EMCS) at comprises of an Energy Asset Server, local asset network (Modbus RS485) and AWS
- EMCS is used to provide a control and data logging interface between the Virtual Power Plant (VPP) application and the various

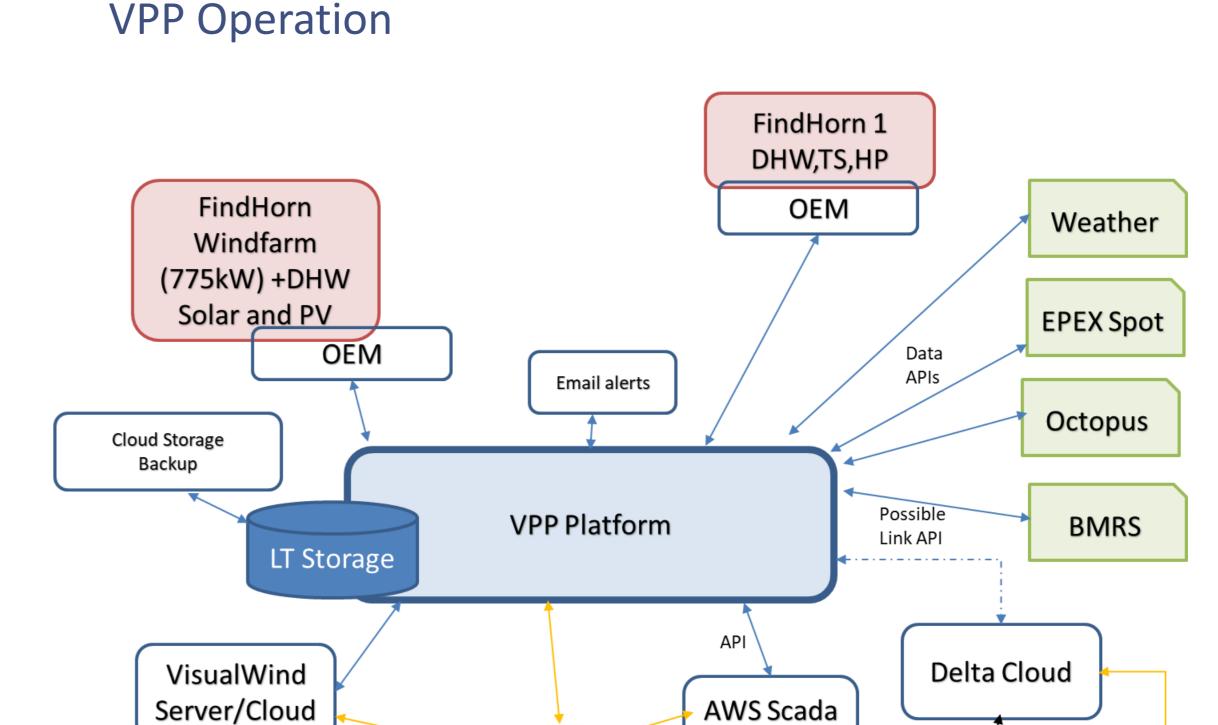



- energy assets and meters installed at the energy pools.
- ECMS gathers operational data from assets at the various energy pools
- ECMS interfaces with AWS database & provides logging of instantaneous data from assets.
- Assets are connected to Modbus network.
- AWS used to host a cloud server which forms the central hub for EMCS data and interaction with separate VPP application.
- Local assets: VLAN over LAN (Energy Asset Network [EAN]). EAN uses Modbus Gateway and RTU's (TCP - RS485) and essentially forms a Modbus network.
- Modbus gateways are used to interface to the various existing Modbus RTU (RS485) devices to Modbus TCP, and to interface with the EMCS server.

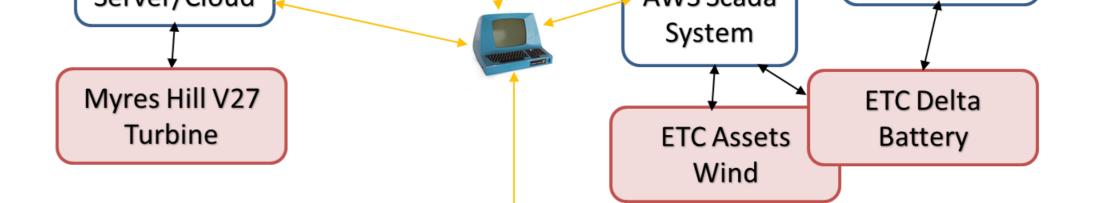

Energy Management Control System (EMCS)

- EAN located at local site i.e. Energy Technology Centre (ETC)
- Module structure shown below

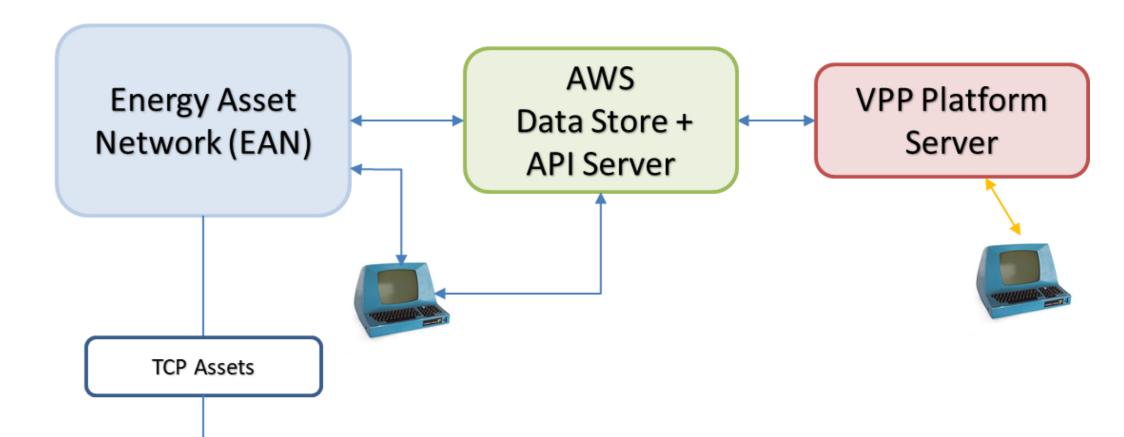

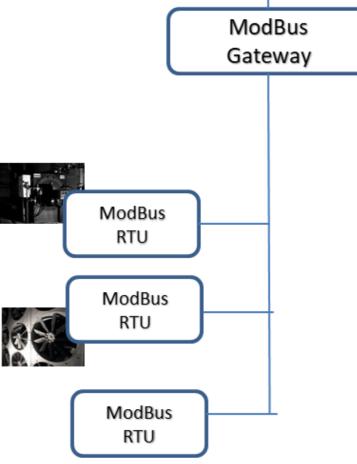



Gary, Howorth Univ of Strathclyde, UK

Ivana, Kockar Univ of Strathclyde, UK

Paul, Touhy Univ of Strathclyde, UK

Graeme, Flett John, Bingham Univ of Strathclyde, UK Energy Technology Centre Ltd, UK




SIES [Smart Integrated Energy Systems: Enhanced Virtual Power Plant VPP+

Energy Pool Integration for Local and Regional Resistance]

VPP Software Design

PyEMLab Structure

- PyEMLab used as the base structure for VPP platform [1-2]
- Module structure shown below

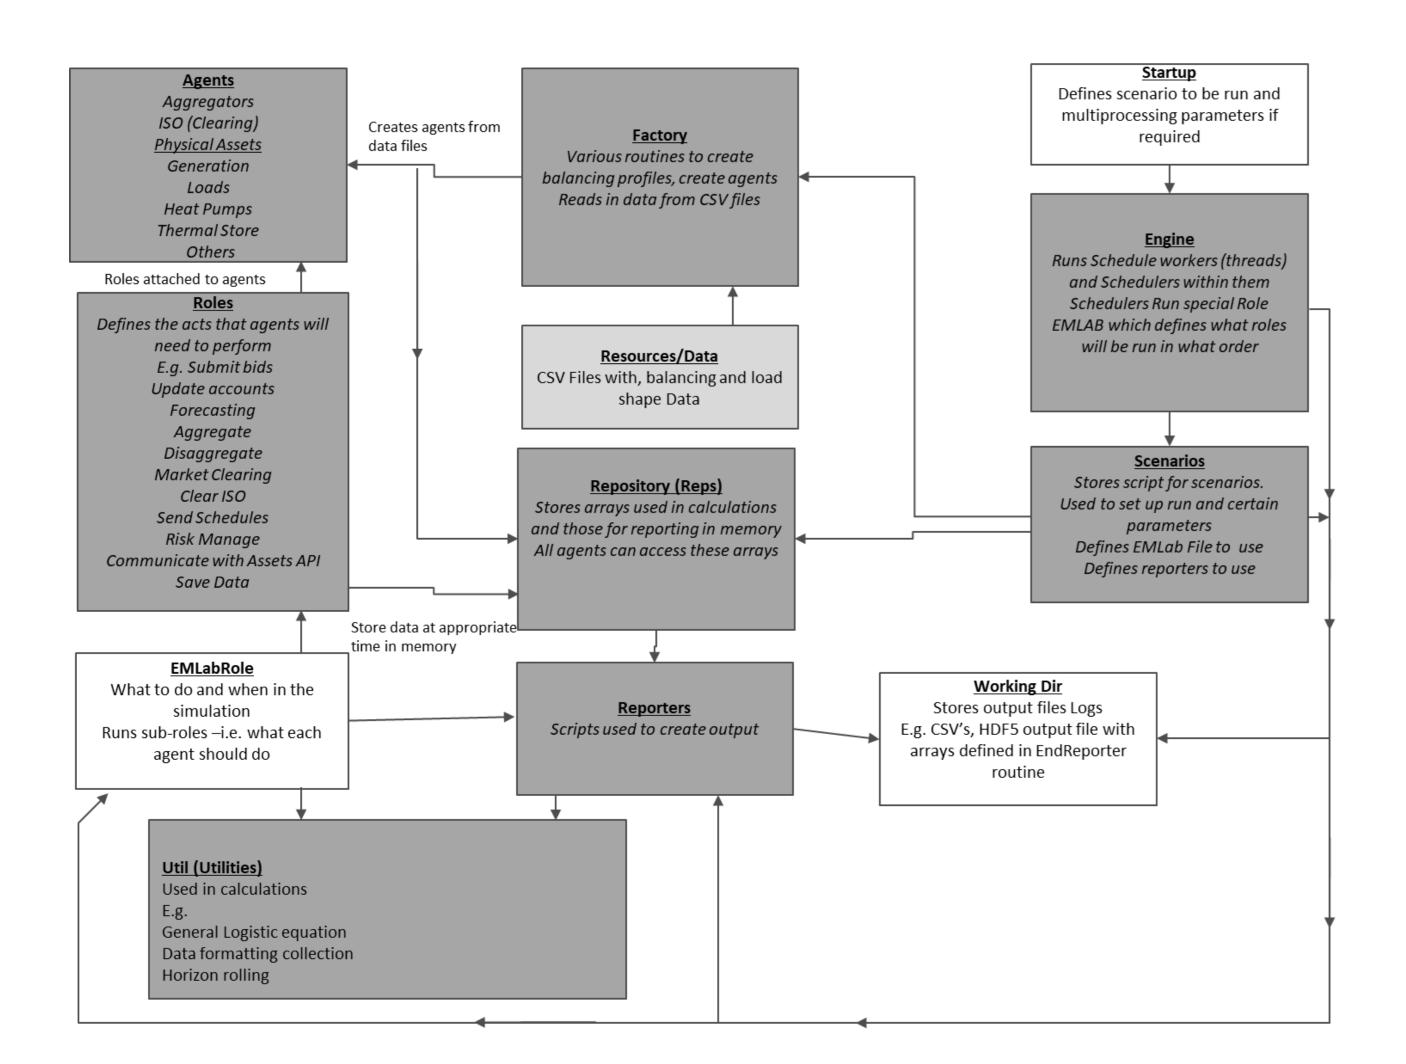


VPP Forecasting


- Forecasting Key part of VPP Functionality
- Data \rightarrow Learn \rightarrow Predict \rightarrow Review
- Prices, Wind Power, Solar, Heat demand, Power demand (Load)
- Weather forecasts used as input
- Using various forecasting techniques including multi linear

regression Machine learning eg XGBoost etc.


Forecasting Overview

VPP Platform Code-Base

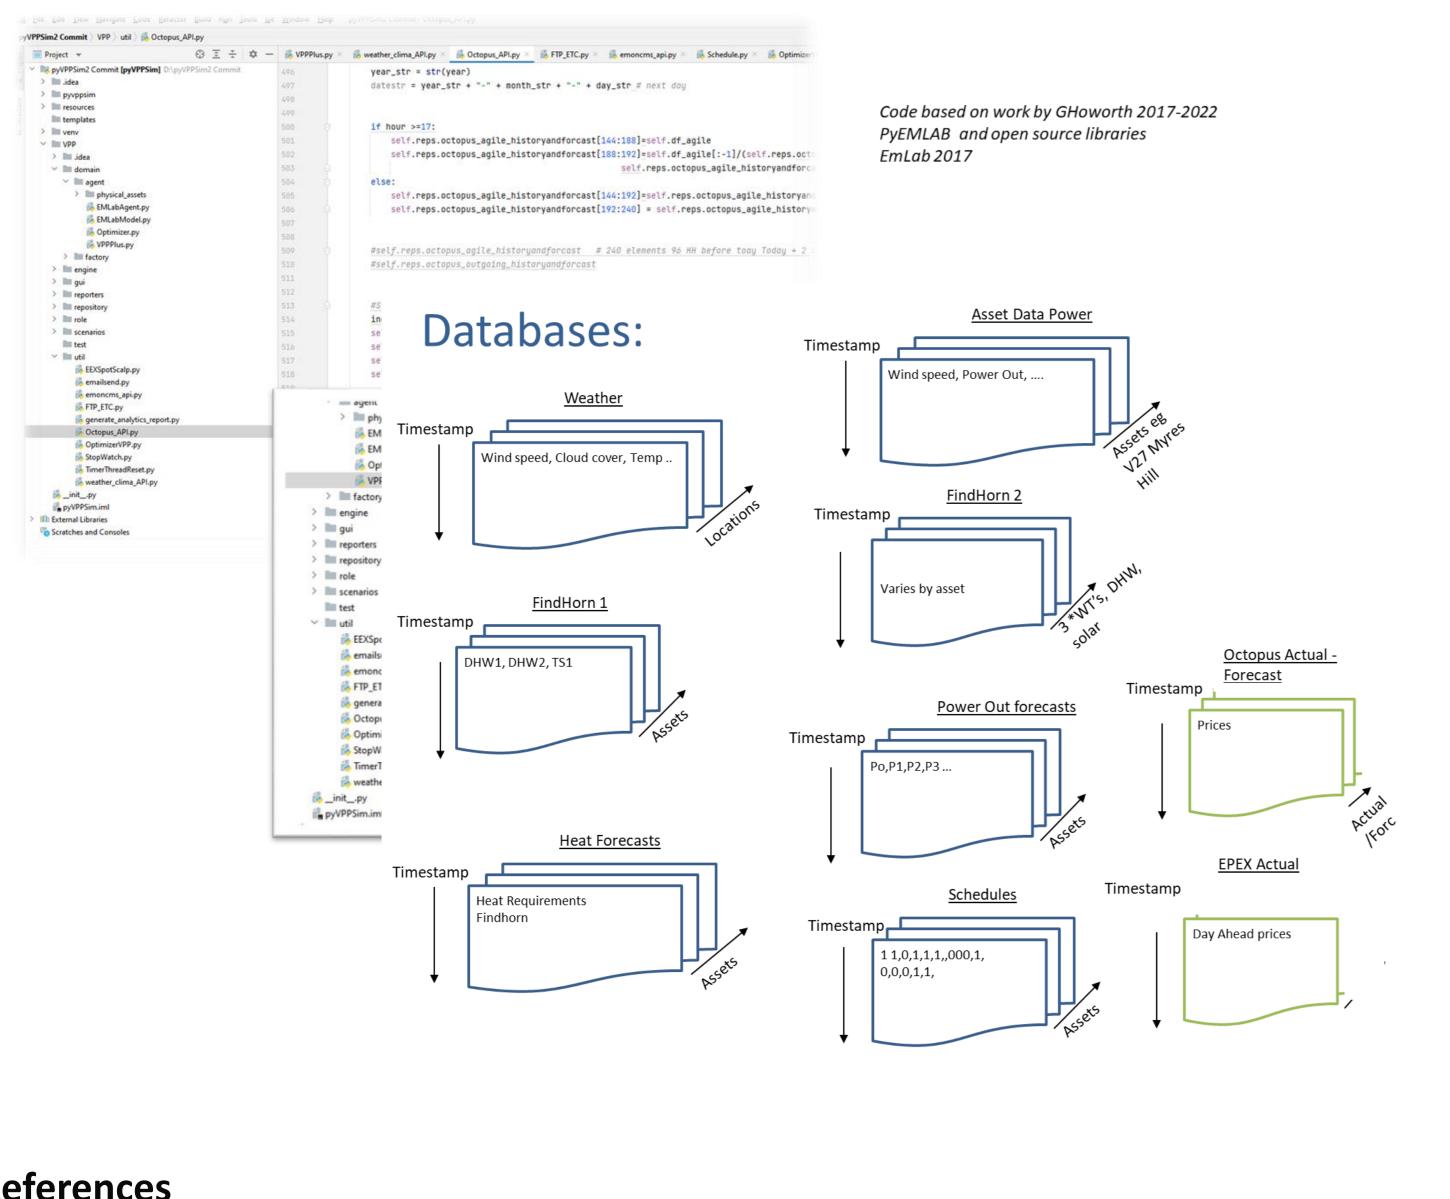

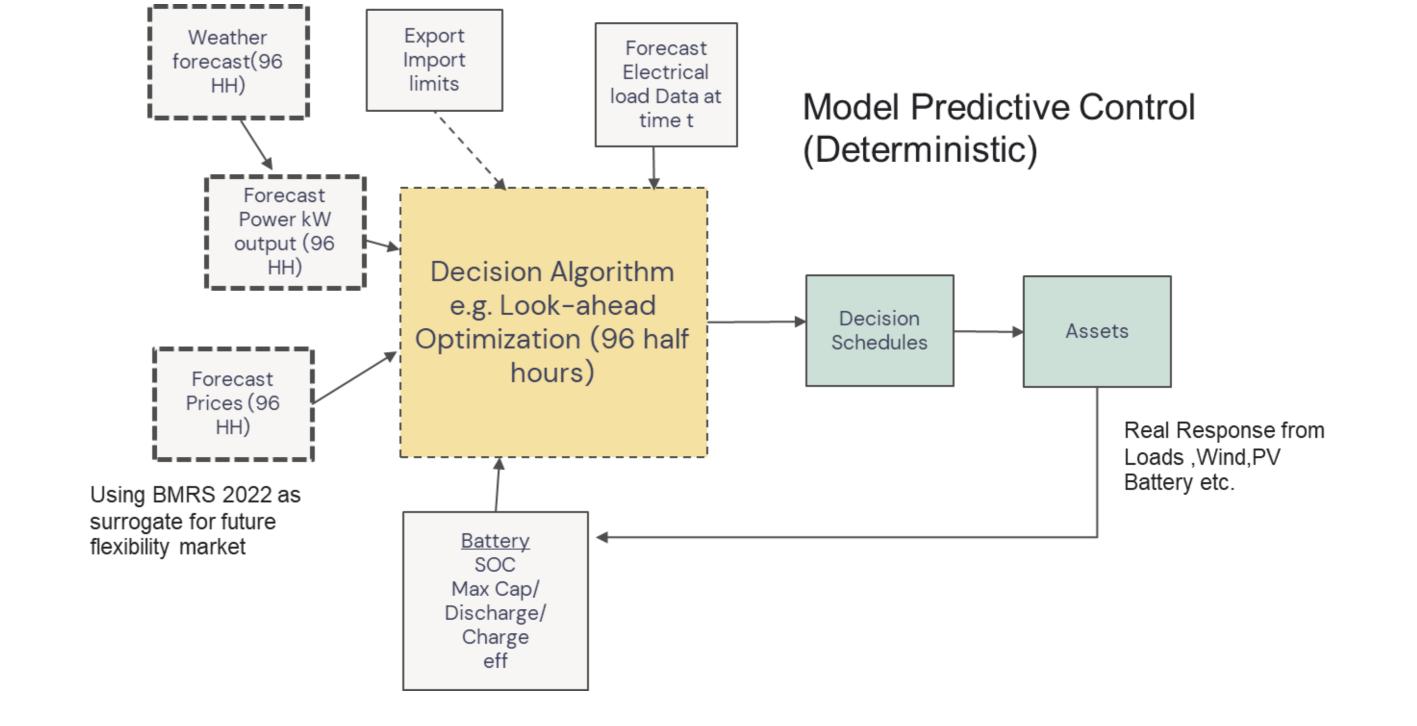

Forecasting Modules

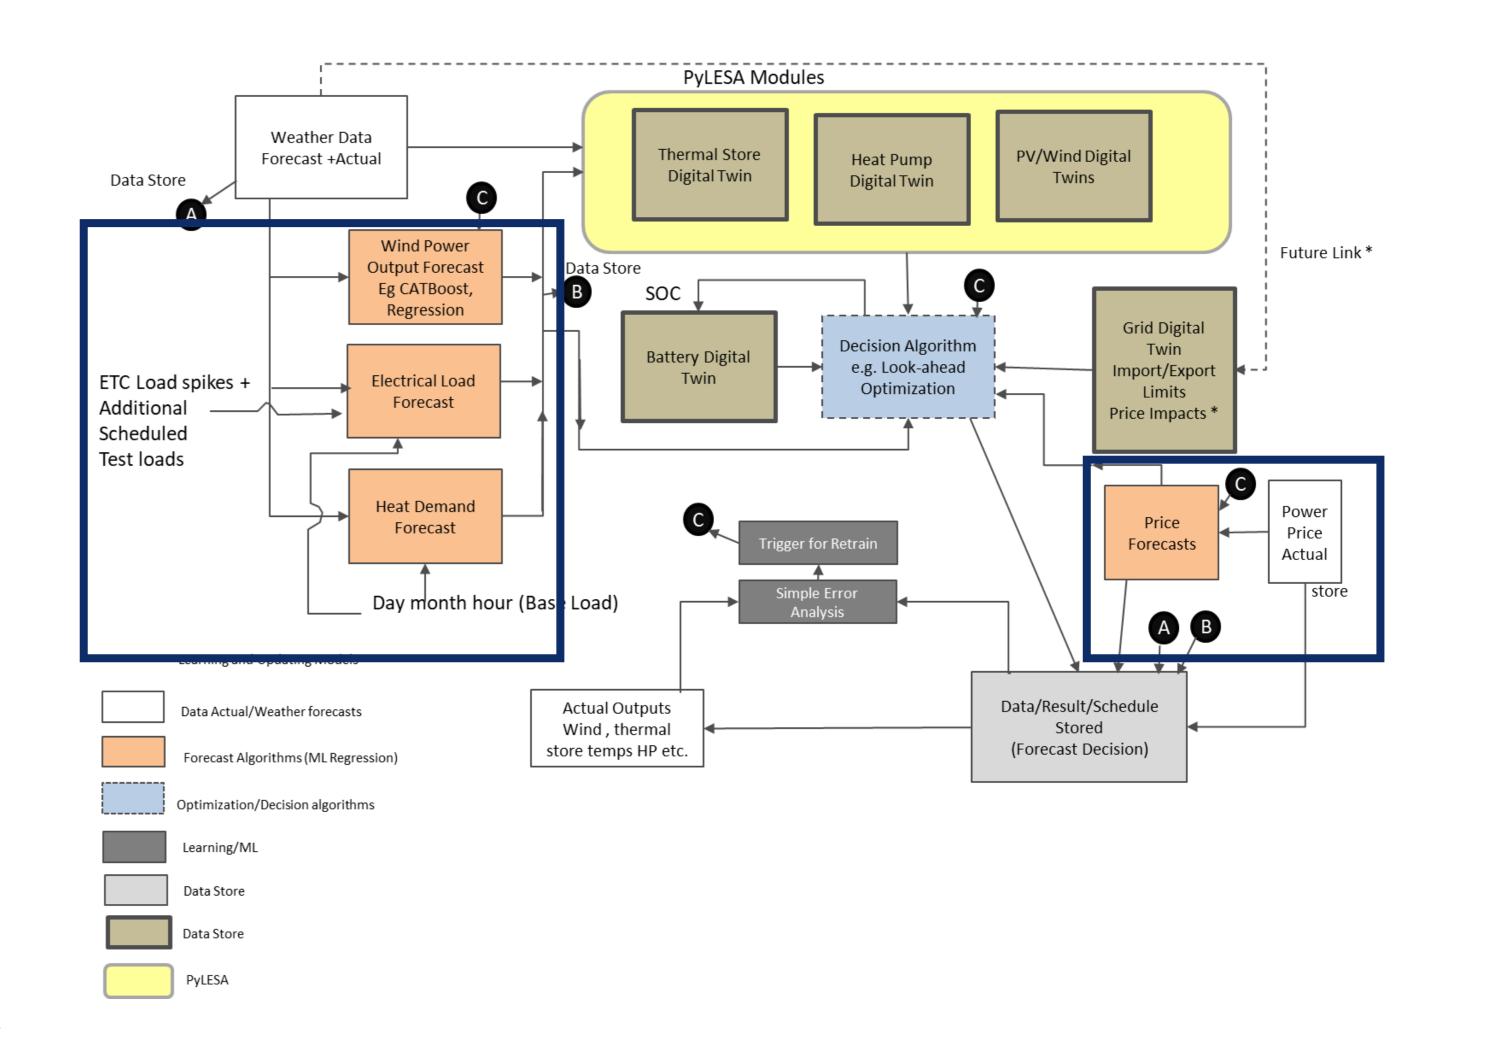

References

[1] G. Howorth, "Extending the AgentSpring/EMLab Tool to Evaluate Additional Agent Behaviour such as Electric Vehicles and Demand Side Response," ed. ETP Annual Conference 2019 - Energy Technology Partnership Dundee UK: ETP, 2019. [2] L. J. De Vries, É. J. L. Chappin, and J. C. Richstein, "EMLab-Generation An experimentation environment for electricity policy analysis," 2013.



Gary, Howorth Univ of Strathclyde, UK

Ivana, Kockar Univ of Strathclyde, UK

Paul, Touhy Univ of Strathclyde, UK

Graeme, Flett John, Bingham Energy Technology Centre Ltd, UK Univ of Strathclyde, UK

SMART INTEGRATED

SIES [Smart Integrated Energy Systems: Enhanced Virtual Power Plant VPP+



Energy Pool Integration for Local and Regional Resistance]

VPP Design Interactions

